


Quad Multi-Set® **Rod Holder Tree**

1

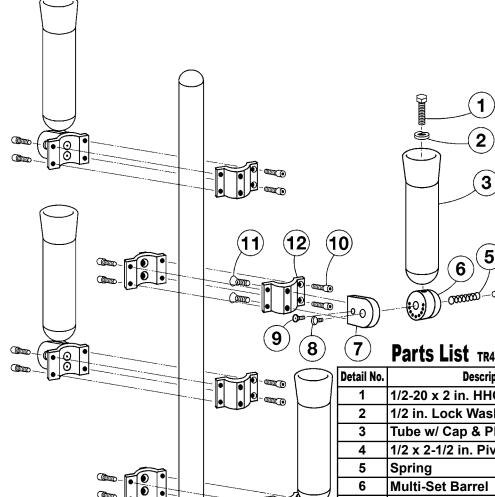


\odot	rai la Lial TR4		
Detail No.	Description	Qty.	Order By Part No.
1	1/2-20 x 2 in. HHCS Bolt	4	2351
2	1/2 in. Lock Washer	4	2241
3	Tube w/ Cap & Plug	4	51221
4	1/2 x 2-1/2 in. Pivot Pin	4	55555
5	Spring	4	2600
6	Multi-Set Barrel	4	55551
7	Multi-Set Igloos	4	55550
8	1/4-20 x 3/8 in. Slotted Truss Hd Screws	4	2158
9	1/4-20 x 3/4 in. Flat Head Screws	4	2009
10	1/4-20 x 3/4 in. SHCS Screws	16	2002
11	1/4-20 x 3/4 in. Flat Head Screws	8	2009
12	Tree Clamps	8	55572
13	36 in. Tree Tube	1	51284
14	Mounting Base	1	
15	Latch Pin Assembly	1	58407
16	4 in. x 6 in. Mounting Plate	1	
17	1/4-20 x 5/8 in. SS Flat Head Socket Bolts	4	

Operating Instructions...

- 1. Hold the rod holder tube at the base and pull out from the locking pin.


 2. Rotate the rod holder to any of the nine
- locking positions.
- 3. Reset the rod holder onto the locking pin.



0 O

Mounting Instructions...

- 1. Make sure all wires below the mounting surface are clear of the area to be drilled.
- 2. Use the mounting base as a template to locate and mark holes.
- 3. Drill the holes in the mounting surface and backing plate together.
- 4. Bolt the mounting base to the surface and backing board and secure with a flat washer and nut.
- 5. Pull out the knob of the latch pin in the mounting base and insert



Rev. No. 9 Revised: 2/20/17 By: PRL Big Jon Sports, Inc. ● 11455 US-31 ● Interlochen, MI 49643